

Easy Table Runner

EXTENSION 
UtahStateUniversity.

Sewing the thread of life.

SEWING AND TEXTILES

extension.usu.edu/sewing

Christine Jensen, M.S., USU Extension Agent, Emery County

Debra Proctor, M.S., USU Extension Agent, Wasatch County

Ronda Olsen, M.S., USU Extension Agent, Uintah County

Karen Biers, Ph. D., USU Extension Specialist

Supplies needed:

1/3 yard (12") fabric for feature
fabric 1/2 yard (18") fabric for
border/back Sewing machine

Matching thread

Basic Sewing Supplies (see Fact Sheet:
FL/ST/ Construction 2008/101 Wash fabric
before cutting to eliminate shrinkage and
remove excess dye. Straighten edges and
press fabric.




Sewing clue—Woven fabric grainline is established by pulling a thread across the fabric from selvage edge to selvage edge. Clip $\frac{1}{2}$ inch into the fabric along one selvage edge. Grasp one or two crosswise threads between your thumb and index finger and pull gently while pushing the fabric toward the other selvage edge with your other hand. Cut along the line left by the pulled threads. Another way to straighten the edge is to tear the fabric. Tearing the fabric causes the edge to become stretched and ruffled. Shrink the stretched edge by steam pressing the fabric back into shape. The fabric will now lie flat. Fold the fabric in half matching the selvages and the newly straightened edges. The fabric should lie flat with the edges matching. If it does not lie flat, realign the fabric by holding the long edge of the fabric along the selvage edge and gently “pulling” the fabric on the bias. This will realign the threads so that the crosswise threads run at right angles to the lengthwise threads.


Diagram Key:

Pattern markings:


Sewing clue—Becoming familiar with the markings in the Diagram Key will aid you in reading instructions. Most patterns have similar keys.



Right side of
of feature fabric border/background
fabric





Right side of



Wrong side
feature

Cutting instructions:

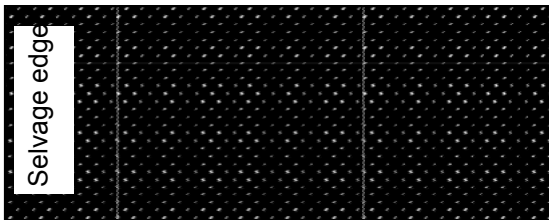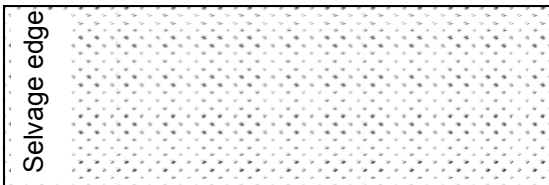

Step #1


✕ From the feature fabric:

Cut one rectangle 12" long and the width of the fabric.

✕ From the border/backing fabric:

Cut one rectangle 18" long and the width of the fabric

Sewing clue—Fabrics come in different widths such as 42", 45", 54" and 60". When cutting the table runner width make sure that both pieces are cut the same width.

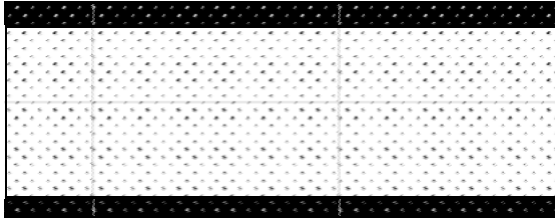

Step #2

- ✕ Turn right side out.


Step #3

- ✕ Lay on a flat surface and smooth backing to form border.

- Press table runner so that borders are even on each side of the feature fabric.

Step #4


- ✕ To prevent the edges from fraying use a seam finish across both ends.

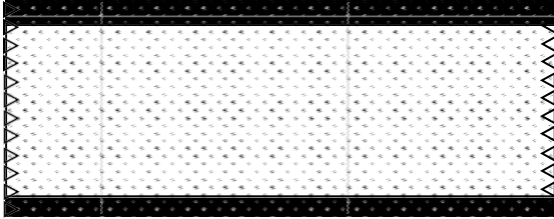

Sewing clue—A seam finish is a way to prevent a seam from fraying. An easy finish is to zig-zag over the seam's raw edge. Set the stitch length at 2.5 and the width at 3.5. On a light weight fabric a three step zig-zag stitch can help prevent a puckered edge. Serging over the raw edge would also prevent the edge from fraying.

Step #5

- ✕ To make end points, match border seams on each end and pin.
- ✕ Sew with a 1/4" seam allowance on each end (for beginning sewers use a 1/2" seam allowance).

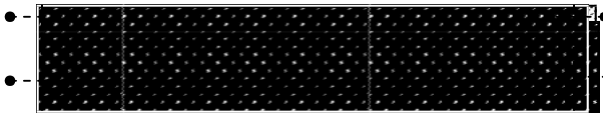


- ✕ Cut corner at an angle to remove excess bulk.

- Press seam open.

Step #6

- ✕ Turn right side out leaving a point. Repeat on the other end. Be sure that the seam matches the center of the table runner.

- Press.

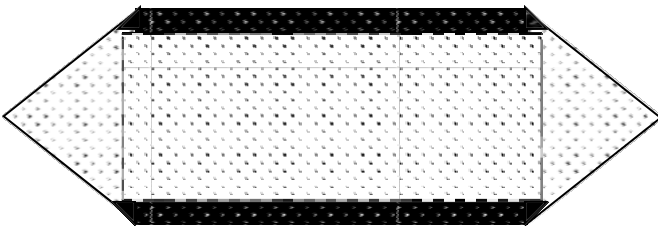

Step #7

- ✕ Tack or sew down pointed ends. Optional trims may include buttons, tassels, rick rack, etc.